



Aluminio EN AW-6060 T66 (AlMgSi)



Codo a 90° con lados largos

50 x 1,5 mm R=250 mm SV 2 x 200 mm
50 x 2 mm R=300 mm SV 2 x 200 mm
60 x 1,5 mm R=500 mm SV 2 x 200 mm




Codo a 60° con lados largos

45 x 2 mm R=300 mm SV 2 x 150 mm


Codo a 45° con lados largos

50 x 1,5 mm R=250 mm SV 2 x 200 mm

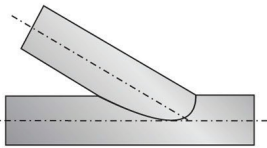


pieza de distribución 30°

40 x 1,5 mm
50 x 2,0 mm

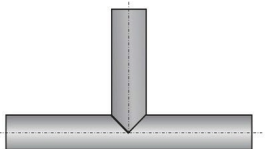


Pieza "T"

40 x 1,5 mm 200/150
60 x 3,0 mm 200/90

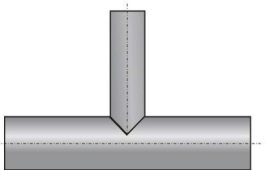

Reducción "T"


60/45 x 3 mm 200/90

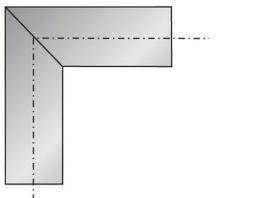


Ángulo

60/60 x 2 mm 120/120

Curveamos Según diseño

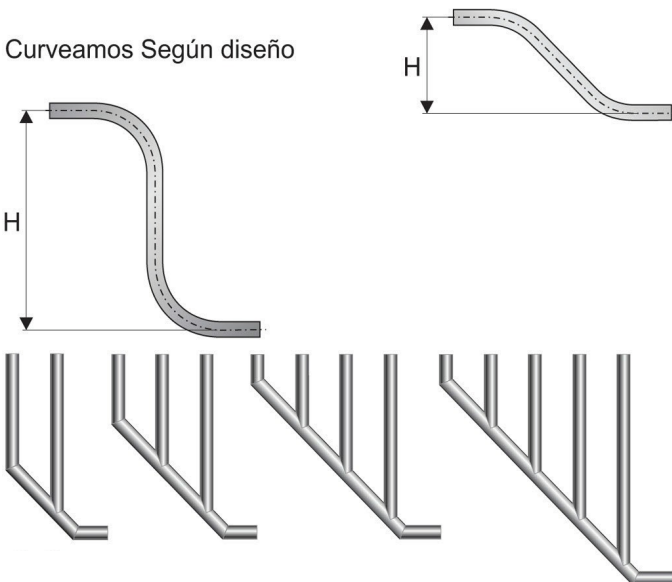

Acero inoxidable 1.4301



Codo a 90° con lados largos

38 x 1,5 mm R=500 mm SV 2 x 200 mm
44,5 x 2 mm R=110 mm SV 2 x 150 mm
44,5 x 2 mm R=115 mm SV 2 x 150 mm
44,5 x 2 mm R=300 mm SV 2 x 120 mm
44,5 x 2 mm R=300 mm SV 2 x 150 mm
44,5 x 2 mm R=300 mm SV 150/250mm
45 x 1,5 mm R=500 mm SV 2 x 200 mm
50 x 2 mm R=300 mm SV 2 x 200 mm
50 x 2 mm R=500 mm SV 2 x 200 mm
60 x 2 mm R=300 mm SV 2 x 200 mm
60 x 2 mm R=500 mm SV 2 x 200 mm
60 x 2 mm R=300 mm SV 2 x 120 mm

Codo a 45° con lados largos

50 x 2 mm R=500 mm SV 2 x 200 mm
60 x 2 mm R=300 mm SV 2 x 120 mm


Codo a 30° con lados largos

38 x 1,5 mm R=500 mm SV 2 x 200 mm
44,5 x 2 mm R=300 mm SV 2 x 200 mm




Pieza "Y" 30°

44 x 1,5 mm




pieza de distribución 30°

38 x 2,0 mm
45 x 1,5 mm
50 x 2,0 mm
60 x 2,0 mm
70 x 2,0 mm




Pieza de distribución reducida

60/45 x 2 mm



Pieza "T"

40 x 1,5 mm 200/130



Rodilla a 90°

60 x 2 mm R=76 SV 2 x 150



Reducción

60/45 x 2 mm L=150 mm

También Codos de vidrio disponibles